



SAHAND DOUR (GEARBOX X)

گیربکس W30

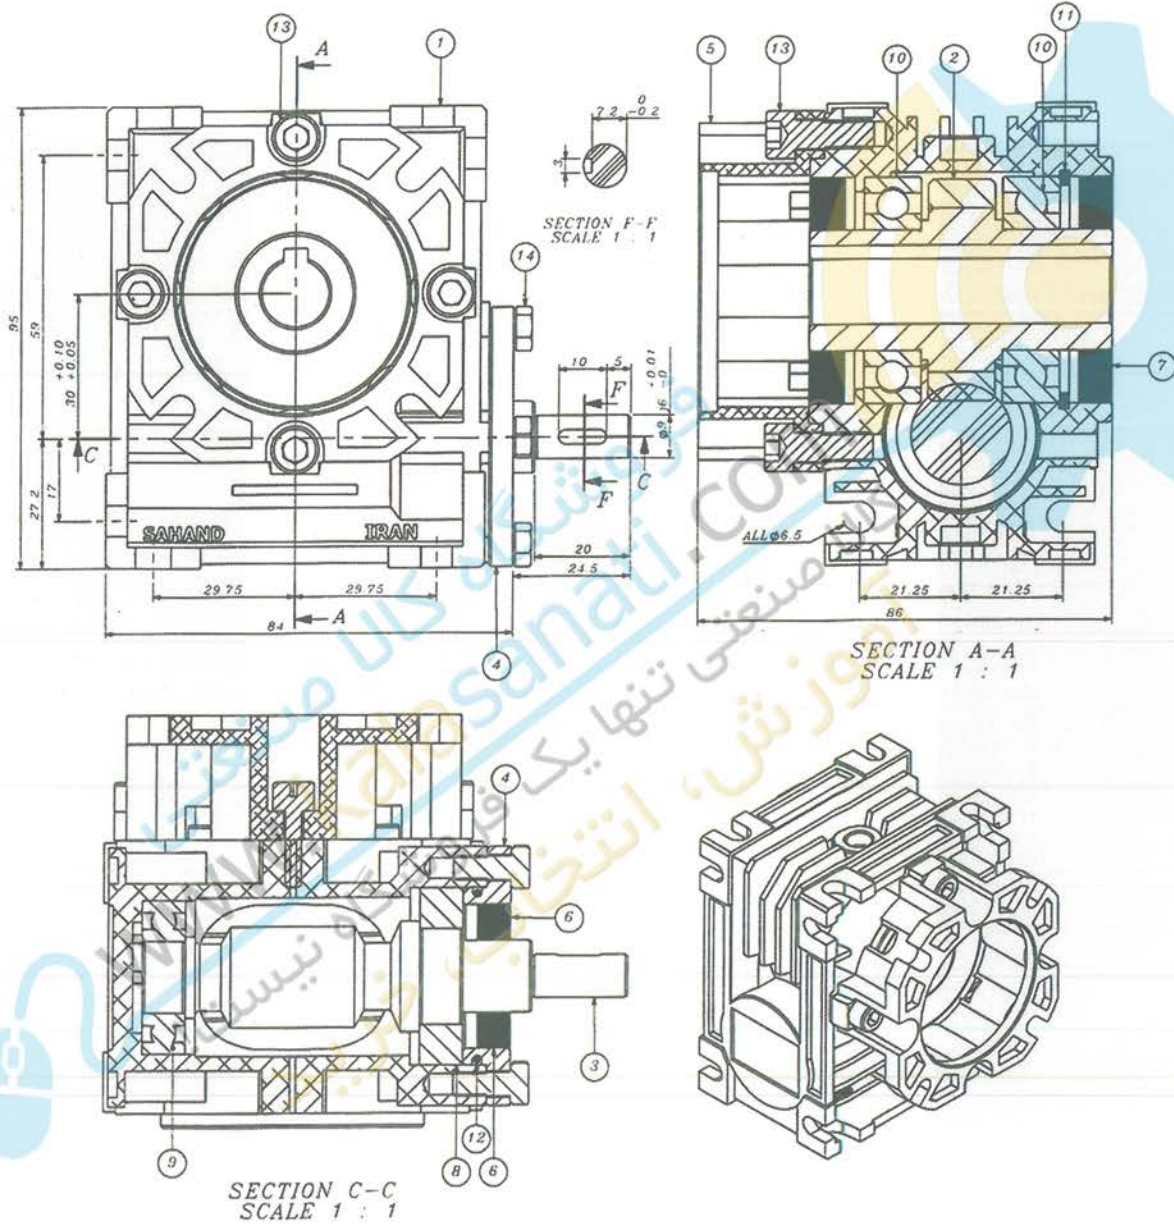


SAHAND DOUR (GEARBOX X)

گیربکس W30 با فلنج P56 B5

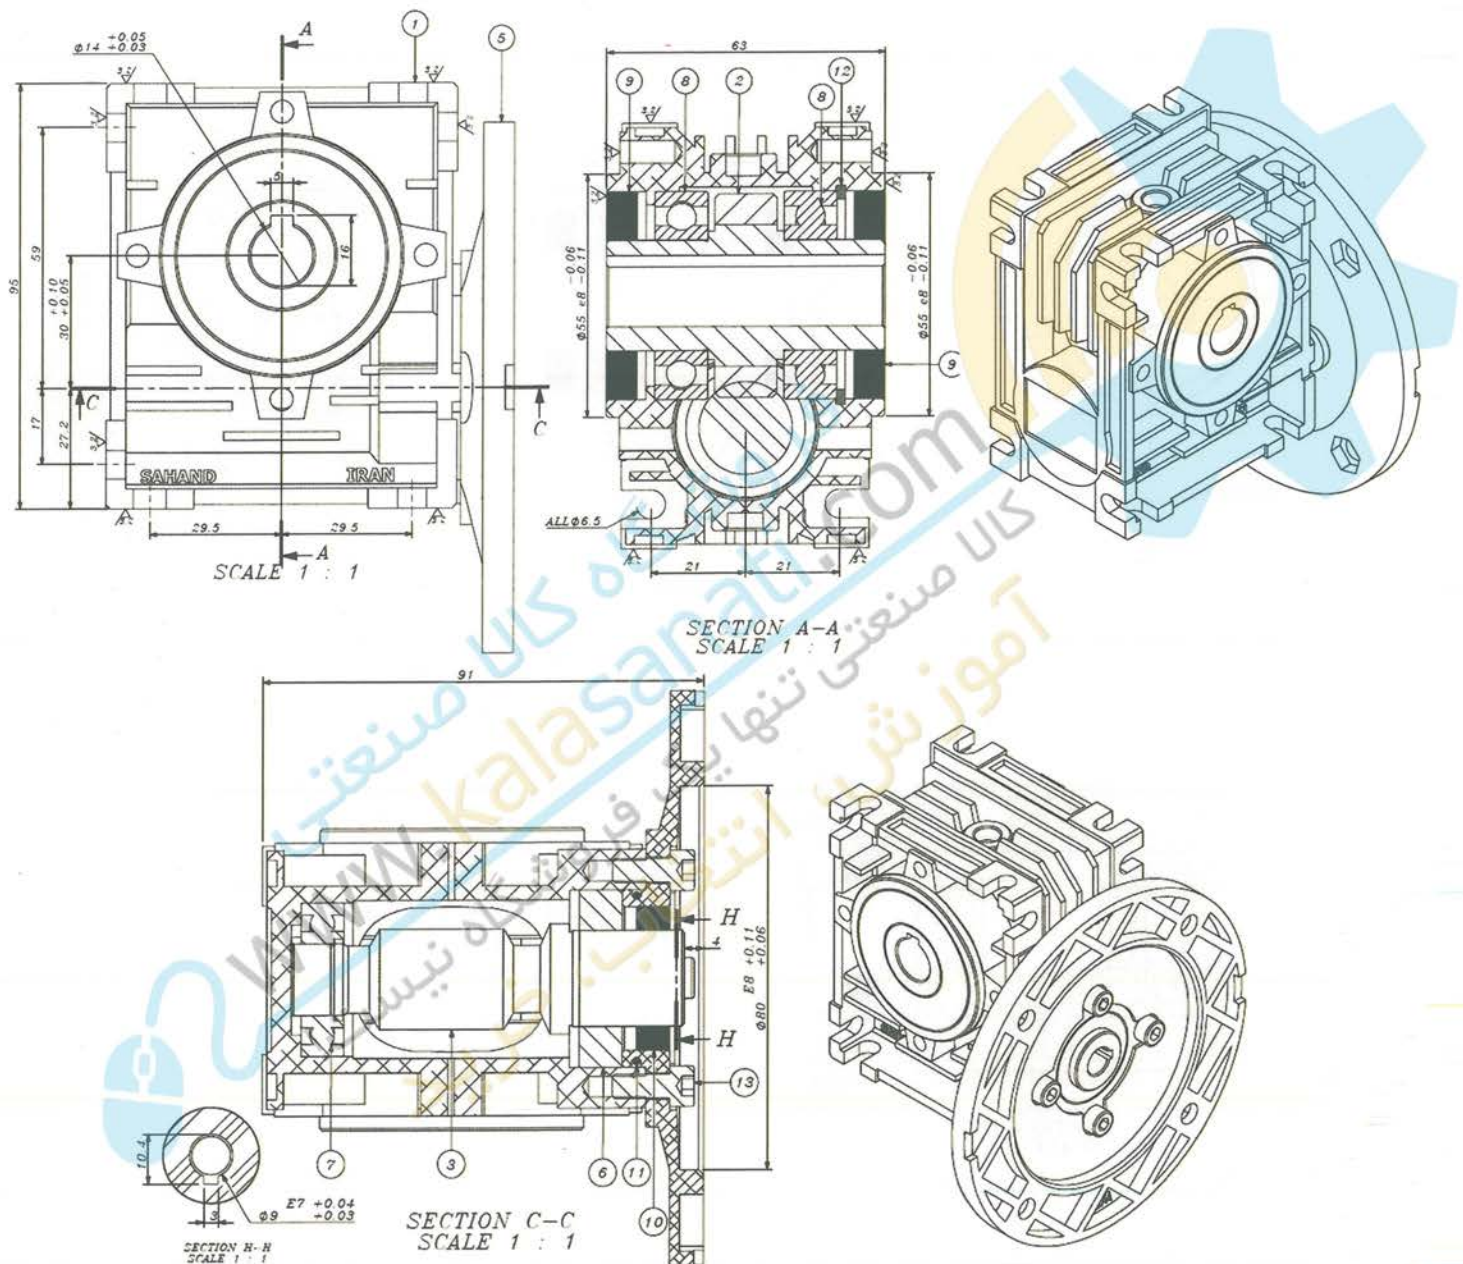







SAHAND DOUR (GEARBOX X)

گیربکس W30 با فلنج P56 B14

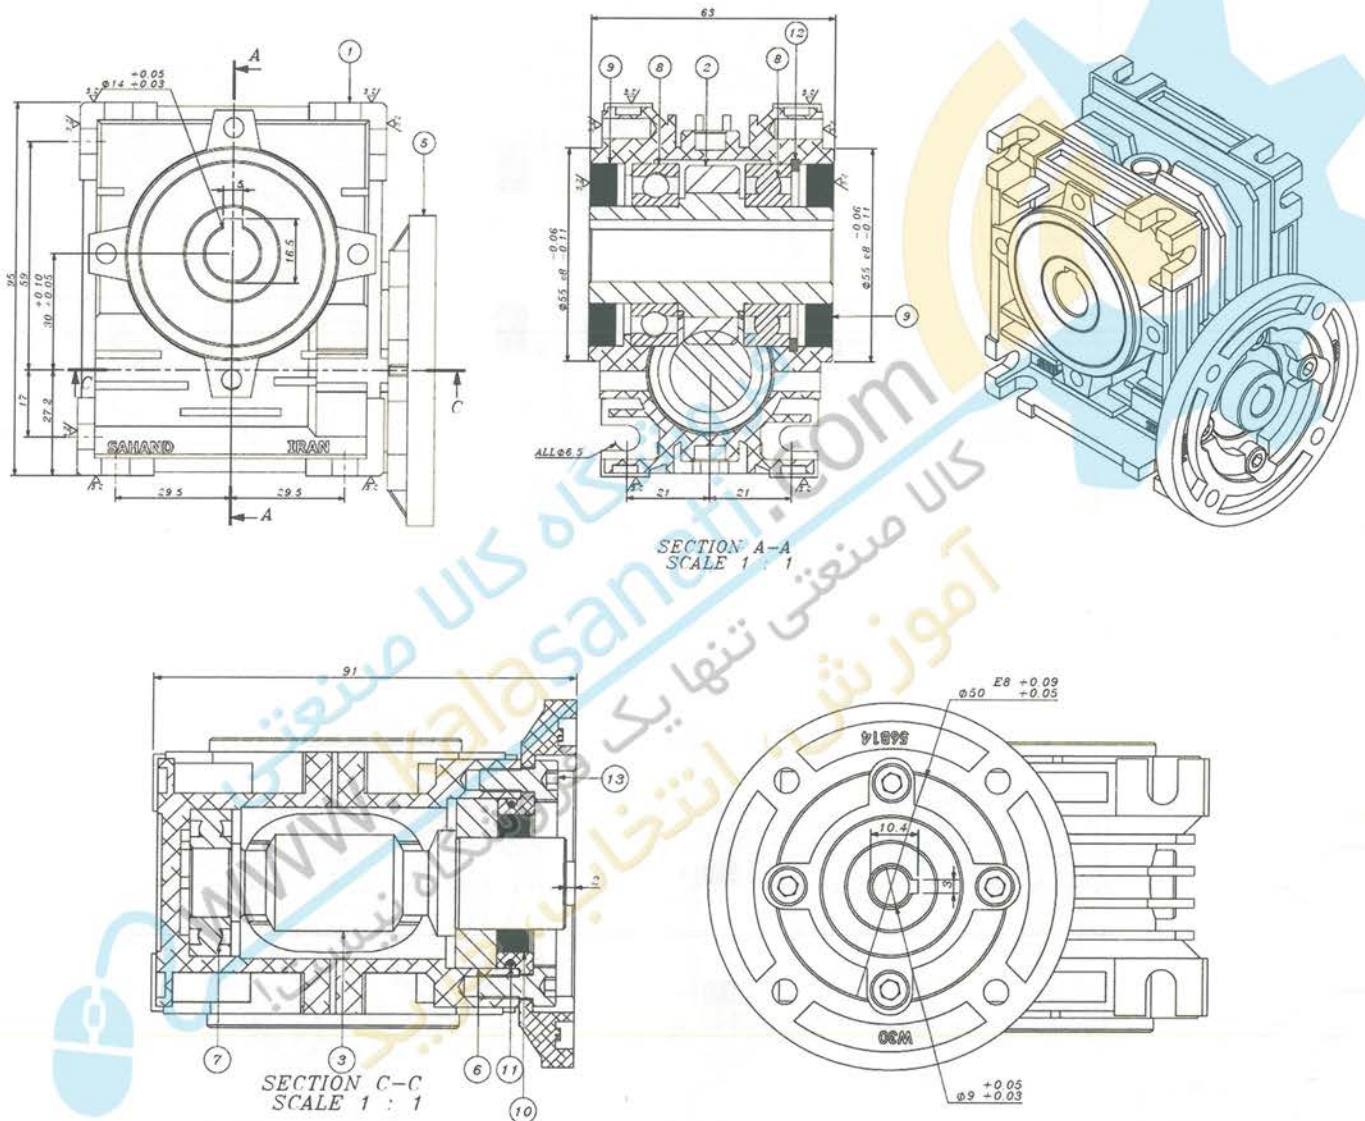


SAHAND DOUR (GEARBOX X)

گیربکس W30 با فلنج P63 B5

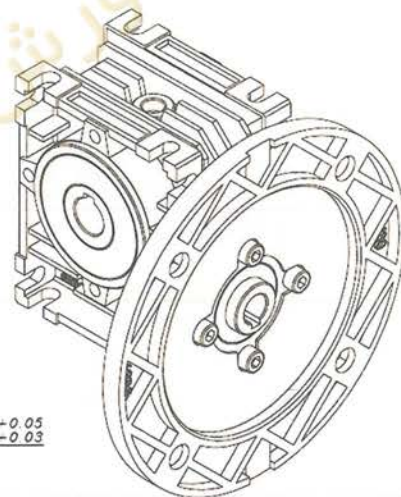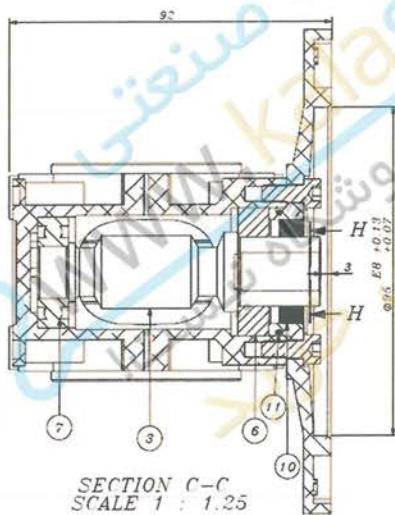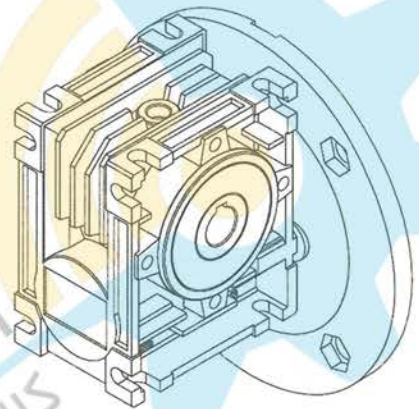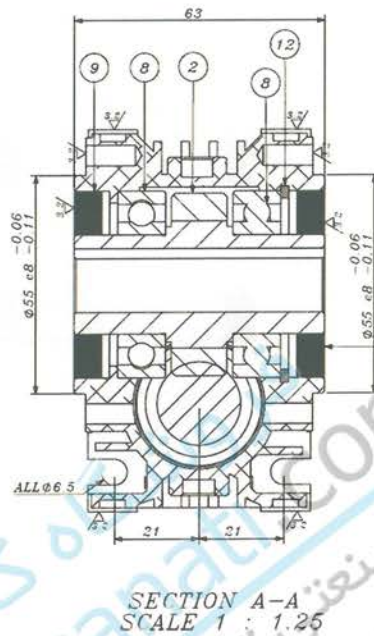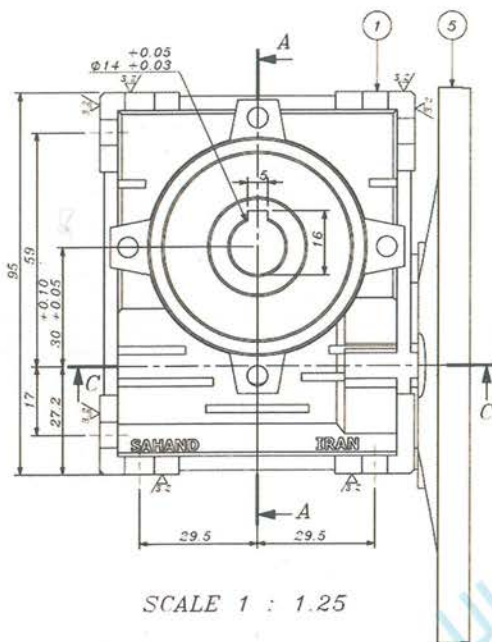

گیربکس

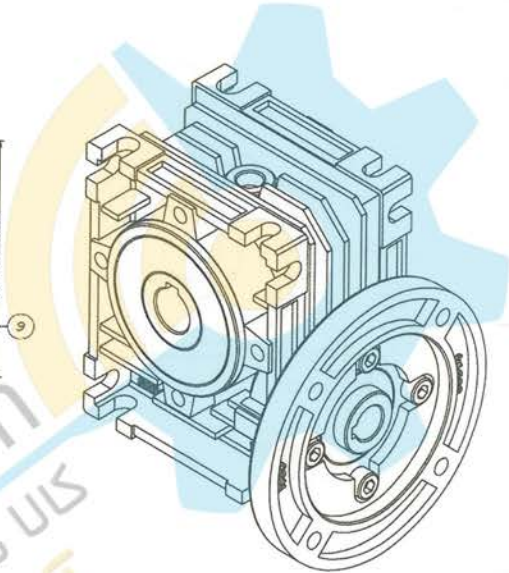

SAHAND DOUR (GEARBOX X)

مشخصات گیربکس های حلزونی سری W30

1400 r.p.m W 30				
i	HP _i	KW _i	M _i danm	N _i
7	0.55	0.41	1.6	200
10	0.4	0.3	1.6	140
15	0.32	0.24	1.8	93
20	0.25	0.19	1.8	70
30	0.21	0.15	2	47
40	0.16	0.12	1.9	35
60	0.12	0.09	1.9	24
70	0.1	0.07	1.5	20

N1 900 r.p.m W 30				
i	HP _i	KW _i	M _i danm	N _i
7	0.41	0.3	1.8	129
10	0.3	0.22	1.8	90
15	0.23	0.17	2	60
20	0.19	0.14	2	45
30	0.16	0.12	2.2	30
40	0.12	0.09	2	23
60	0.09	0.07	2	15
70	0.07	0.05	1.8	13

N1 1400 r.p.m MW 30				
i	HP _i	KW _i	M _i danm	N _i
7	0.25	0.18	0.7	200
10	0.25	0.18	1	140
15	0.25	0.18	1.4	93
20	0.25	0.18	1.8	70
30	0.16	0.12	1.5	47
40	0.16	0.12	1.9	35
60	0.16	0.12	1.9	24
70	0.16	0.12	1.9	20