

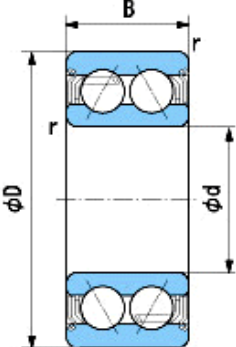
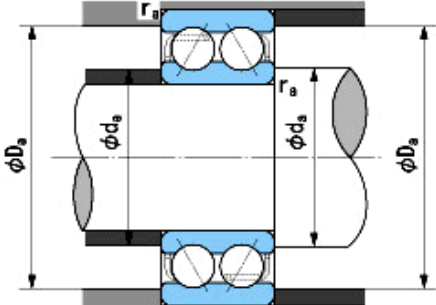
TopPage>>Search Result>>5209ZZ

# Angular Contact Ball Bearings

Bearing No. : **NACHI 5209ZZ**

**Bearing Type** 
**Clearance** 
**Tolerance Class**

(0.006~0.023)

<p>Dimensions</p> <p>d = 45     0              -0.012</p> <p>D = 85     0              -0.015</p> <p>B = 30.2   0              -0.120</p> <p>r = 1.1~2 (Radial Direction)</p> <p>r = 1.1~3.5 (Axial Direction)</p>			<p>Dimensions</p> <p>da(min) = 52</p> <p>Da(max) = 78</p> <p>ra(max) = 1</p> <p>Mass = 0.62 kg</p>
--	--	---	--

<p>Basic Dynamic Load Rating Cr : <b>42,500</b> N</p> <p>Basic Static Load Rating Cor : <b>34,500</b> N</p> <p>Limiting Speed ;</p> <p>Grease Lubrication : <b>5,500</b> min<sup>-1</sup></p> <p>Oil Lubrication : - min<sup>-1</sup></p>	<table border="1"> <thead> <tr> <th></th> <th>INNER RING</th> <th>OUTER RING</th> </tr> </thead> <tbody> <tr> <td>O.D.Surface Runout with Side :</td> <td></td> <td>-</td> </tr> <tr> <td>Axial Runout with Bore :</td> <td>-</td> <td>-</td> </tr> <tr> <td>Axial Runout with Raceway :</td> <td>-</td> <td>-</td> </tr> <tr> <td>Width Variation :</td> <td><b>0.020</b></td> <td><b>0.020</b></td> </tr> <tr> <td>Radial Runout :</td> <td><b>0.015</b></td> <td><b>0.035</b></td> </tr> </tbody> </table>		INNER RING	OUTER RING	O.D.Surface Runout with Side :		-	Axial Runout with Bore :	-	-	Axial Runout with Raceway :	-	-	Width Variation :	<b>0.020</b>	<b>0.020</b>	Radial Runout :	<b>0.015</b>	<b>0.035</b>
	INNER RING	OUTER RING																	
O.D.Surface Runout with Side :		-																	
Axial Runout with Bore :	-	-																	
Axial Runout with Raceway :	-	-																	
Width Variation :	<b>0.020</b>	<b>0.020</b>																	
Radial Runout :	<b>0.015</b>	<b>0.035</b>																	