

TopPage>>Search Result>>2208K


# Self-aligning Ball Bearings

Bearing No. : **NACHI 2208K**

**Bearing Type** 
**Clearance** 
**Tolerance Class** 
  
 (0.019~0.035)

**Dimensions**

$d = 40$   $+0.039$   
 $0$   
 $D = 80$   $0$   
 $-0.013$   
 $B = 23$   $0$   
 $-0.120$   
 $r = 1.1\sim 2$   
 (Radial Direction)  
 $r = 1.1\sim 3.5$   
 (Axial Direction)

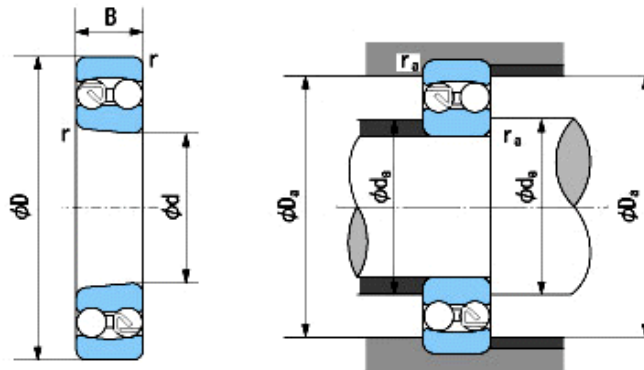

**Dimensions**  
 $d_a(\min) = 46.5$   
 $D_a(\max) = 73.5$   
 $r_a(\max) = 1$   
 Mass = 0.505 kg

Basic Dynamic Load Rating  $C_r$  : **22,400** N  
 Basic Static Load Rating  $C_{or}$  : **7,400** N  
 Limiting Speed ;  
 Grease Lubrication : **7,600**  $\text{min}^{-1}$   
 Oil Lubrication : **9,300**  $\text{min}^{-1}$

	INNER RING	OUTER RING
O.D.Surface Runout with Side :		-
Axial Runout with Bore :	-	
Axial Runout with Raceway :	-	
Width Variation :	<b>0.020</b>	<b>0.020</b>
Radial Runout :	<b>0.015</b>	<b>0.025</b>