

6032 M Deep groove ball bearings

- Popular item

Deep groove ball bearings

Bearing data

[Tolerances,](#)

Normal (metric), P6, P5, Normal (inch),

[Radial internal clearance,](#)


Matched bearing pairs, Stainless steel
 $d < 10$ mm, Other bearings

Bearing interfaces

[Seat tolerances for standard conditions,](#)

[Tolerances and resultant fits](#)

Technical specification

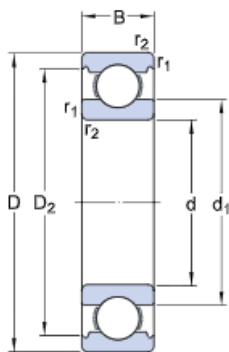


DIMENSIONS

d	160 mm	Bore diameter
D	240 mm	Outside diameter
B	38 mm	Width
d_1	≈ 185.7 mm	Shoulder diameter
D_2	≈ 218.9 mm	Recess diameter
$r_{1,2}$	min. 2.1 mm	Chamfer dimension

ABUTMENT DIMENSIONS

d_s min.	169 mm	Diameter of shaft abutment
D_i max.	231 mm	Diameter of housing abutment
r_a max.	2 mm	Radius of shaft or housing fillet



CALCULATION DATA

C	143 kN	Basic dynamic load rating
C ₀	143 kN	Basic static load rating
P _u	4.3 kN	Fatigue load limit
	5 600 r/min	Reference speed
	4 800 r/min	Limiting speed
k _r	0.025	Minimum load factor
f ₀	15.9	Calculation factor

MASS

	6.02 kg	Mass bearing
--	---------	--------------

TOLERANCE CLASS

Normal	Dimensional tolerances
Normal	Radial run-out